




## Zhejiang Huaxin bearing accessories C...

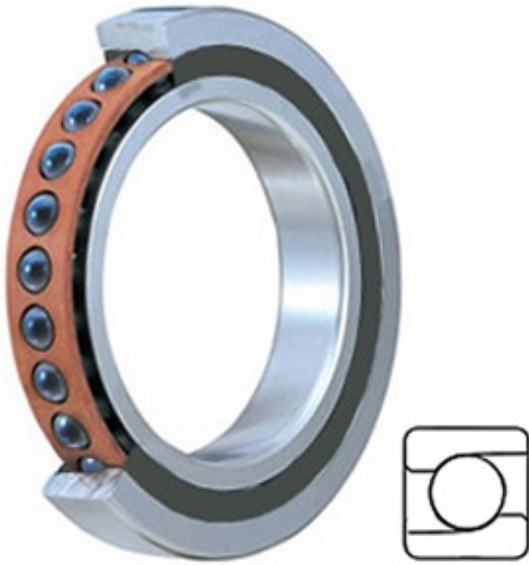

3MMVC9114HXVVSULFS637 Bearing 2D drawings and 3D CAD models

2.756 Inch | 70 Millimeter x 4.331 Inch | 110 Millimeter x 0.787 Inch | 20 Millimeter TIMKEN 3MMVC9114HXVVSULFS637 Precision Ball Bearings

Bearing No. 3MMVC9114HXVVSULFS637

|                      |   |
|----------------------|---|
| Category             | Precision Ball Bearings   |
| Inventory            | 0.0   |
| Manufacturer Name    | TIMKEN  |
| Minimum Buy Quantity | N/A   |
| Weight               | 0.603   |
| EAN                  | 0087796264564   |
| Product Group        | B04270  |
| Enclosure            | 2 Seals   |
| Precision Class      | ABEC 7   ISO P4   |
| Material - Ball      | Ceramic   |
| Number of Bearings   | 1 (Single)  |
| Contact Angle        | 25 Degree   |
| Preload              | Light   |
| Raceway Style        | 1 Rib Inner Ring and Outer Ring   |
| Cage Material        | Phenolic  |
| Rolling Element      | Ball Bearing  |
| Enclosure Type       | Non Contact Seal  |
| Mounting Arrangement | Universal   |
| Flush Ground         | Yes   |
| Inch - Metric        | Metric  |
| Other Features       | Single Row   Angular Contact   Super High Precision   Hybrid   Corrosion Resistant Ball |



## Zhejiang Huaxin bearing accessories C...

|                          |  |
|--------------------------|--|
|                          | High Speed Seal  |
| Long Description         | 70MM Bore; 110MM Outside Diameter; 20MM Width; 2 Seals Enclosure; ABEC 7   ISO P4 Precision; Ceramic Ball Material; 1 (Single) Bearings; 25 Degree Contact Angle; Phenolic Cage Material; 1 Rib Inner Ri |
| Category                 | Precision Ball Bearings  |
| UNSPSC                   | 31171531   |
| Harmonized Tariff Code   | 8482.10.50.28  |
| Noun                     | Bearing  |
| Keyword String           | Angular Contact Ball   |
| Manufacturer URL         | <a href="http://www.timken.com">http://www.timken.com</a>  |
| Manufacturer Item Number | 3MMVC9114HXVVSULF<br>S637  |
| Weight / LBS             | 1.33   |
| D                        | 4.331 Inch   110 Millimeter  |
| d                        | 2.756 Inch   70 Millimeter   |
| B                        | 0.787 Inch   20 Millimeter   |